
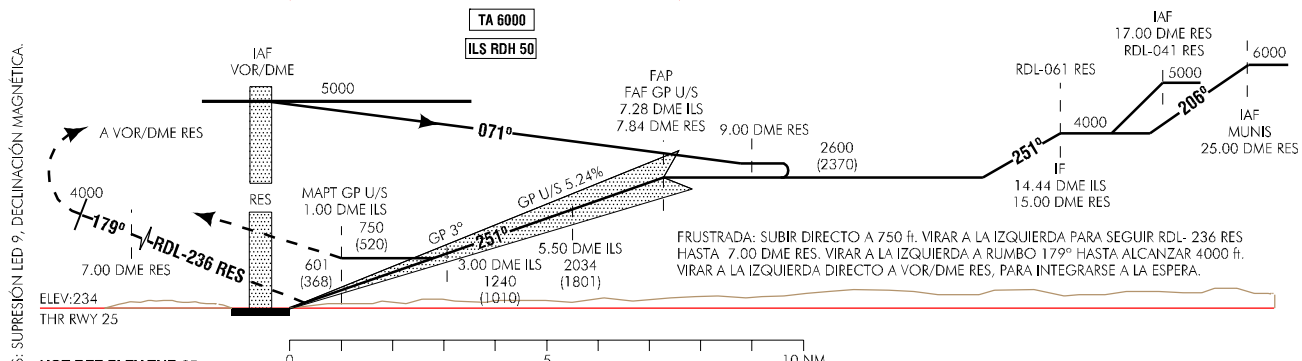


CARTA DE APROXIMACIÓN
POR INSTRUMENTOS-OACI

ELEV AD
234

APP 118.15
TWR 118.15
GMC 121.70

REUS
VOR/DME-ILS
RWY 25

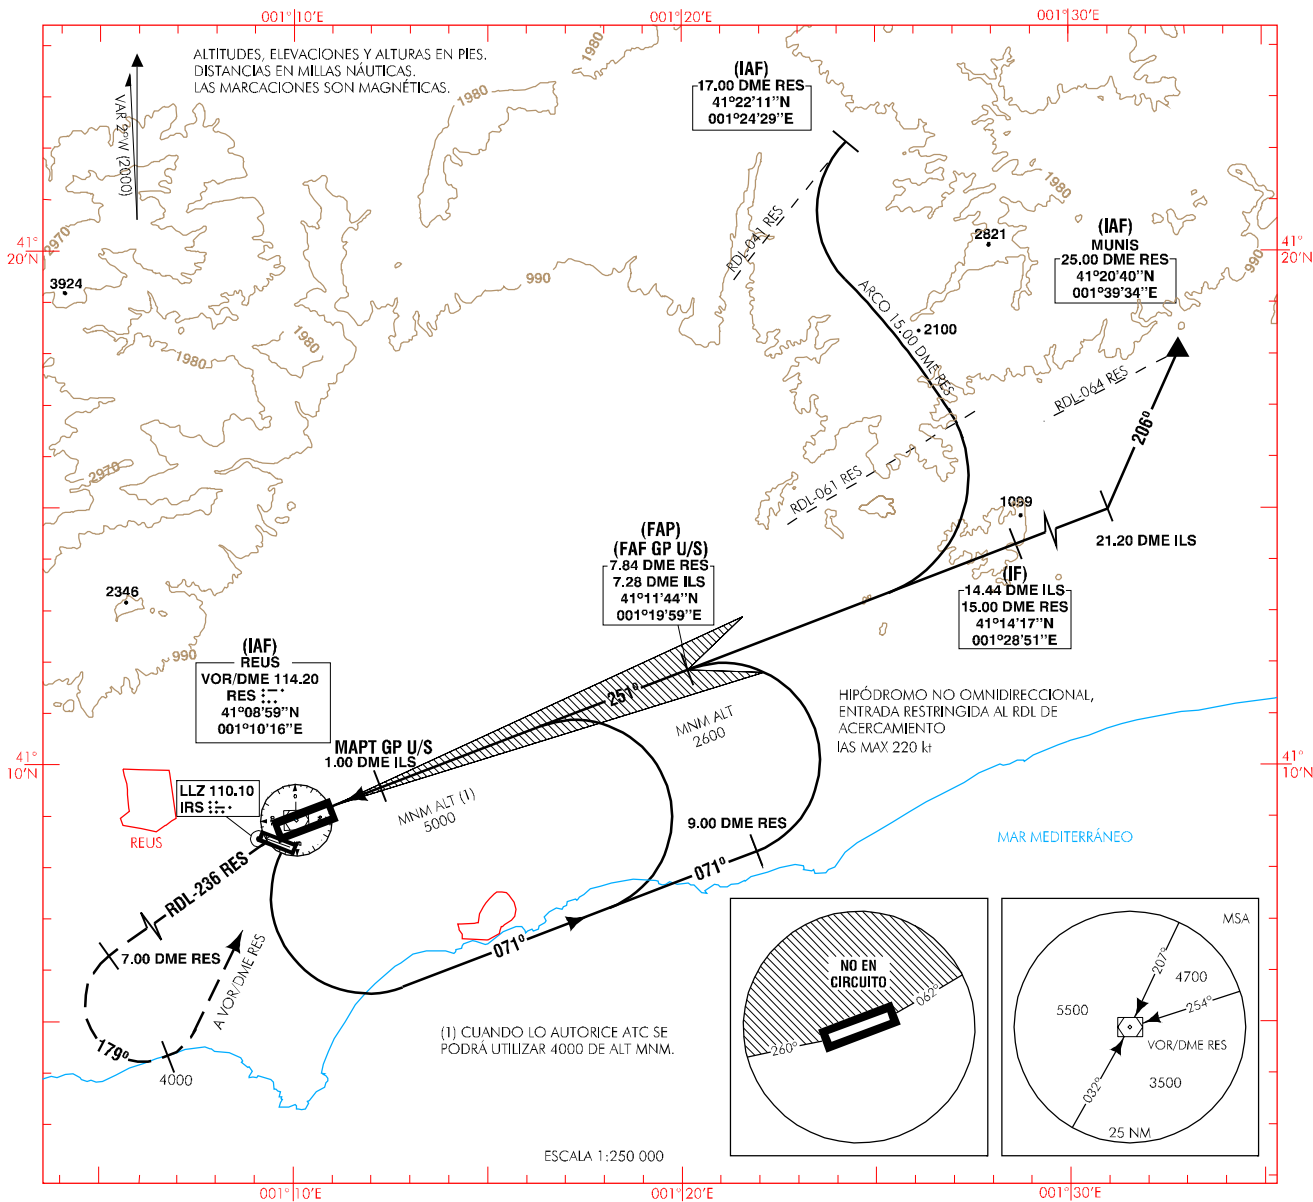

CAMBIO: SUPRESIÓN LED 9, DECLINACIÓN MAGNÉTICA.

HGT REF ELEV THR 25		A	B	C	D
STA	CAT I	420 (186)	430 (196)	440 (206)	450 (216)
	GP U/S	750 (520)			
En circuito (H) sobre 234		850 (620)	890 (660)	1050 (820)	1070 (840)

GS	kt	80	100	120	140	160	180
FAP-THR: 7.28 NM	min:s	5:28	4:22	3:38	3:07	2:44	2:26
FAF-MAPT: 6.28 NM	min:s	4:43	3:46	3:08	2:41	2:21	2:06
ROD: 5.24 %	ft/min	425	531	637	743	849	955
ALT/HGT DME (ILS) FNA GP U/S							
13 DME	12 DME	11 DME	10 DME	9 DME	8 DME	7 DME	6 DME
						2520 (2290)	2200 (1970)
						1880 (1650)	1560 (1330)
						1240 (1010)	920 (690)