


CARTA DE APROXIMACIÓN  
POR INSTRUMENTOS-OACI


ELEV AD  
2775

TWR 122.20

VALLADOLID  
ILS  
RWY 23

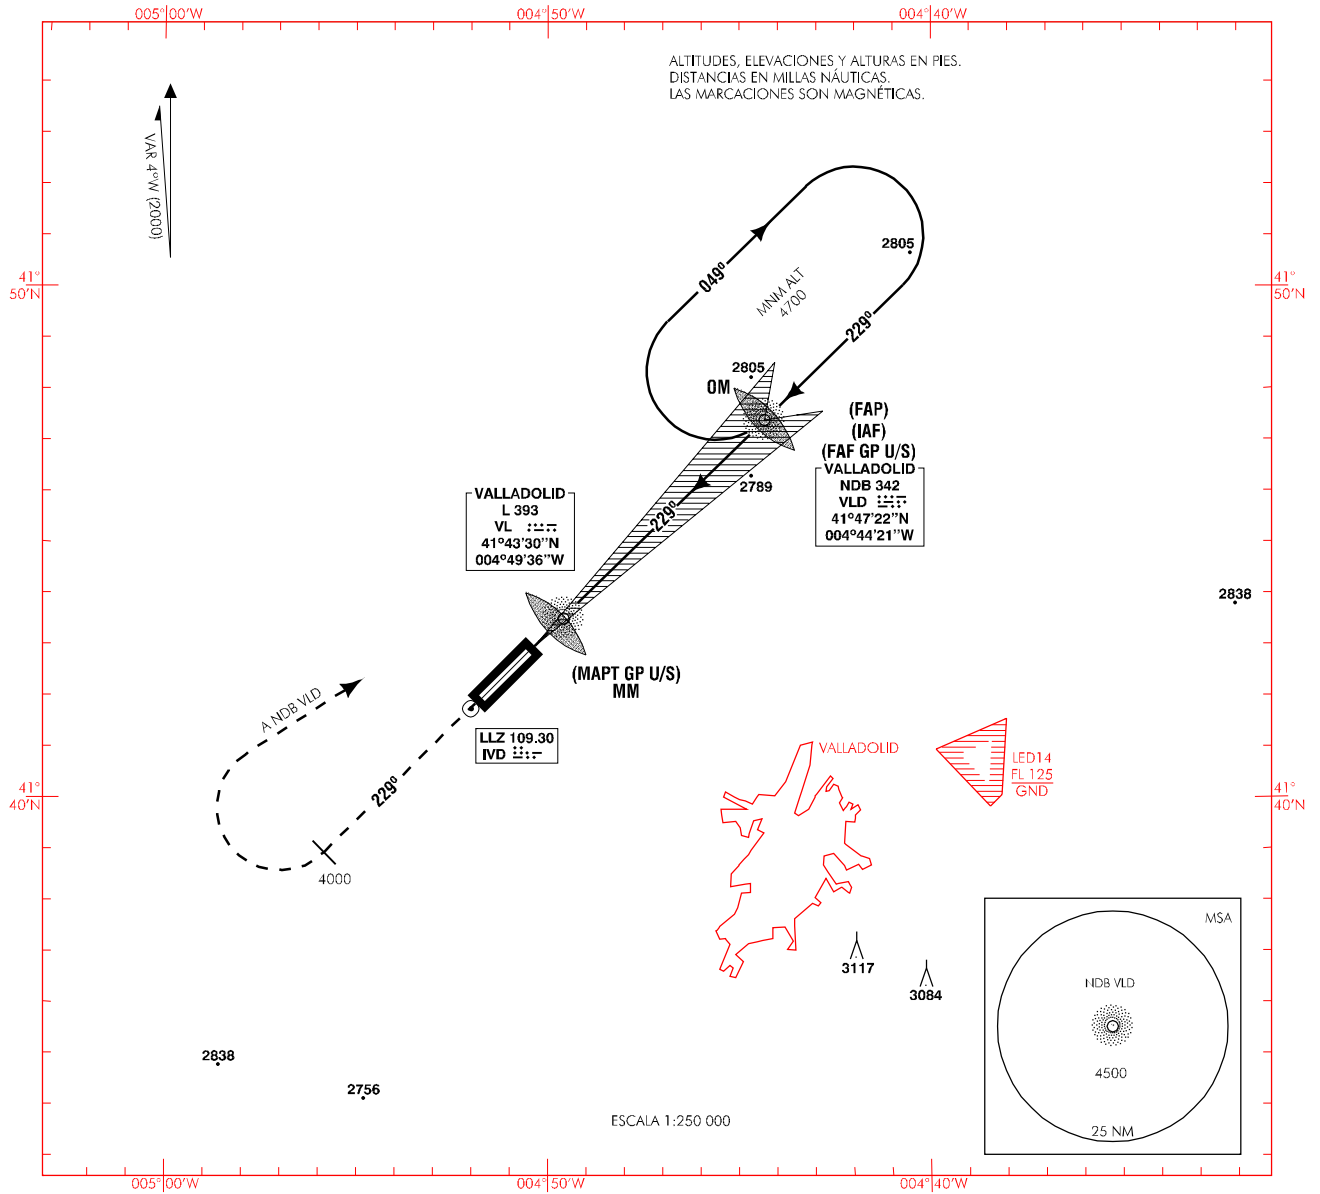

FRUSTRADA: SUBIR DIRECTO A 4000 ft. VIRAR A LA DERECHA DIRECTO AL NDB VLD SUBIENDO A 4700 ft PARA INTEGRARSE A LA ESPERA.

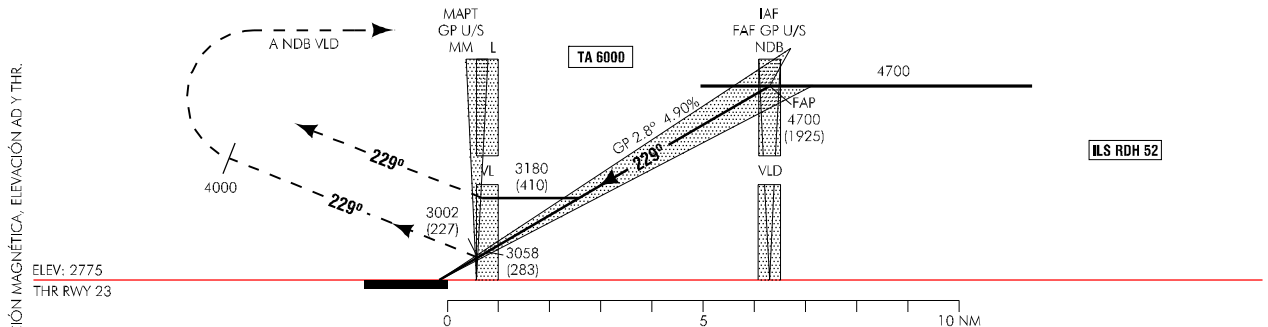

ELEV: 2775  
THR RWY 23

HGT REF ELEV THR RWY 23

OCA/H		A	B	C	D
STA	CAT I	2980 (205)	2990 (215)	3000 (225)	3010 (235)
	GP U/S	3180 (410)			
En circuito (H) sobre 2775		3200 (430)	3280 (510)	3380 (610)	3480 (710)

GS	kt	80	100	120	140	160	180					
FAP-THR: 6.29 NM	min:s	4:43	3:46	3:09	2:42	2:22	2:06					
FAF-MAPT: 5.70 NM	min:s	4:17	3:25	2:51	2:27	2:08	1:54					
ROD: 4.90%	ft/min	397	496	595	695	794	893					
ALT/HGT DME ( ) FNA												
13 DME	12 DME	11 DME	10 DME	9 DME	8 DME	7 DME	6 DME	5 DME	4 DME	3 DME	2 DME	1 DME

04-OCT-01 (AMDT 76/01)

AIP-ESPAÑA

AD 2-LEVD IAC/1

CAMBIOS: DECLINACIÓN MAGNÉTICA, ELEVACIÓN AD Y THR.